



| | |
|-------------------------------------|---|
| Nominal Voltage: | 1.4 V |
| Rated Capacity: | 290 mAh at 1500 ohm to 1.1 V at 21°C (70°F) |
| Nominal Internal Impedance: | 7.5 ohm @ 1kHz |
| Average Weight: | 0.8 gm |
| Volume: | 0.26 cm ³ |
| Terminals: | Flat |
| Operating Temperature Range: | 0°C to 50°C (32°F to 122°F) |
| ANSI: | 7000 ZD |
| IEC: | PR48 |

Typical Discharge Characteristics at 21°C (70°F)

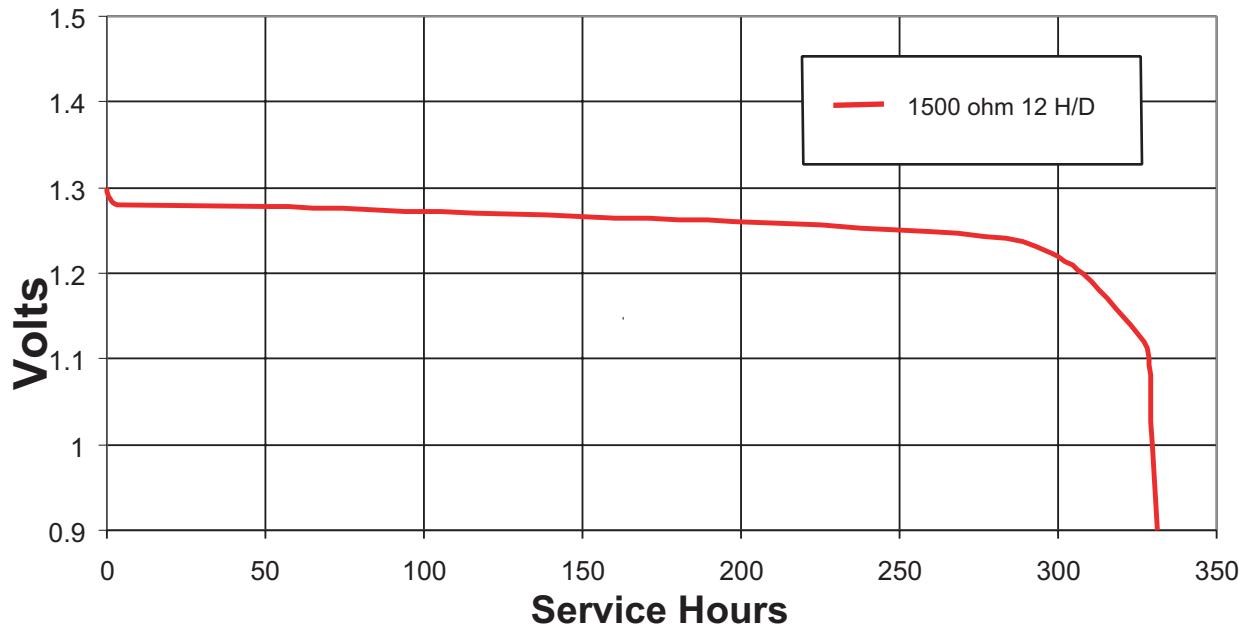

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the chart and discharge data shown for examples of the energy / service life that the battery will provide.