




TM

MN2400

Size: AAA (LR03)


Alkaline-Manganese Dioxide Battery

Zn/MnO₂

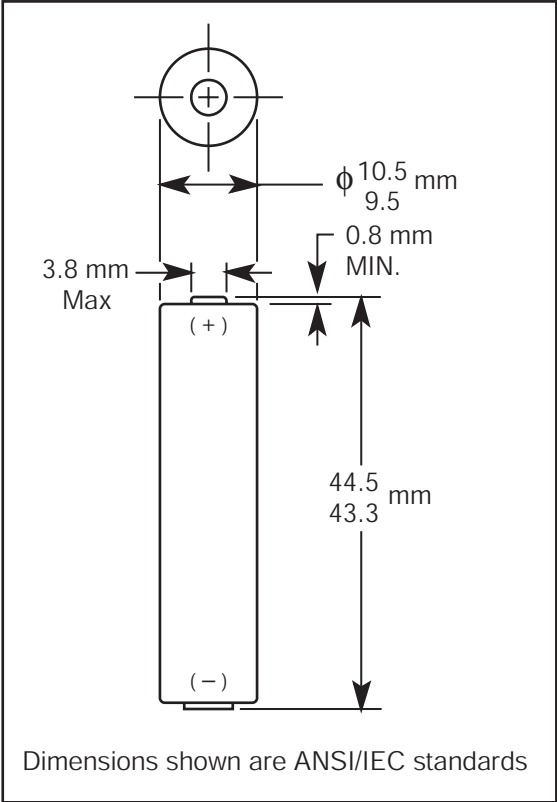

Nominal Voltage:	1.5 V
Nominal Internal Impedance:	250 m-ohm @ 1kHz
Average Weight:	11 gm (0.39 oz.)
Volume:	3.5 cm ³ (0.21 in. ³)
Terminals:	Flat
Operating Temperature Range:	-20°C to 54°C (-4°F to 130°F)
ANSI:	24A
IEC:	LR03

TYPICAL DISCHARGE CHARACTERISTICS AT 21°C (70°F)

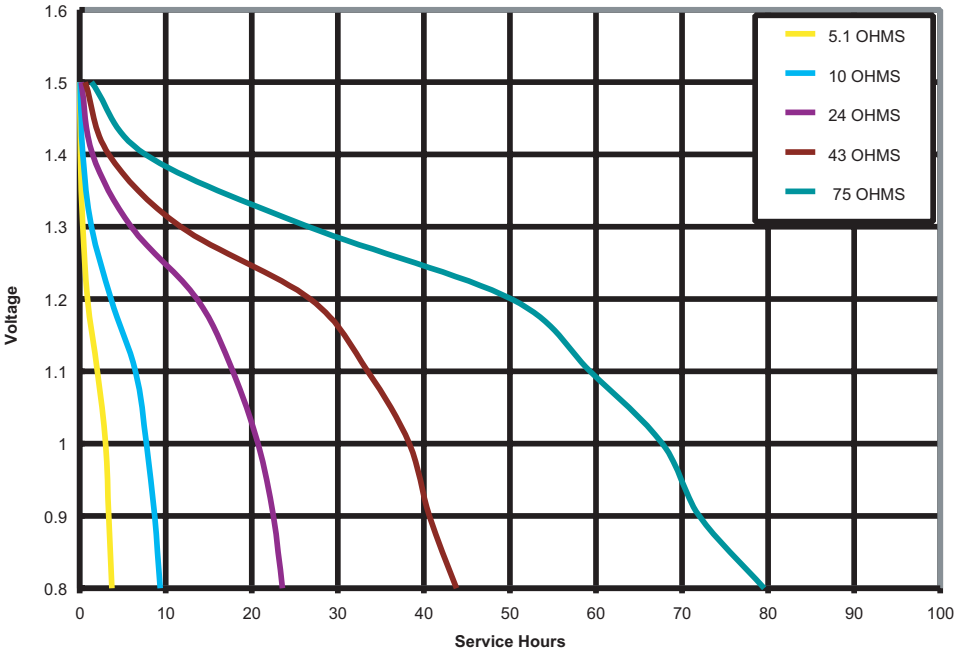

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.



TM


MN2400

Size: AAA (LR03)


Alkaline-Manganese Dioxide Battery

Zn/MnO₂


TYPICAL CONSTANT CURRENT DISCHARGE
CHARACTERISTICS AT 21°C (70°F)

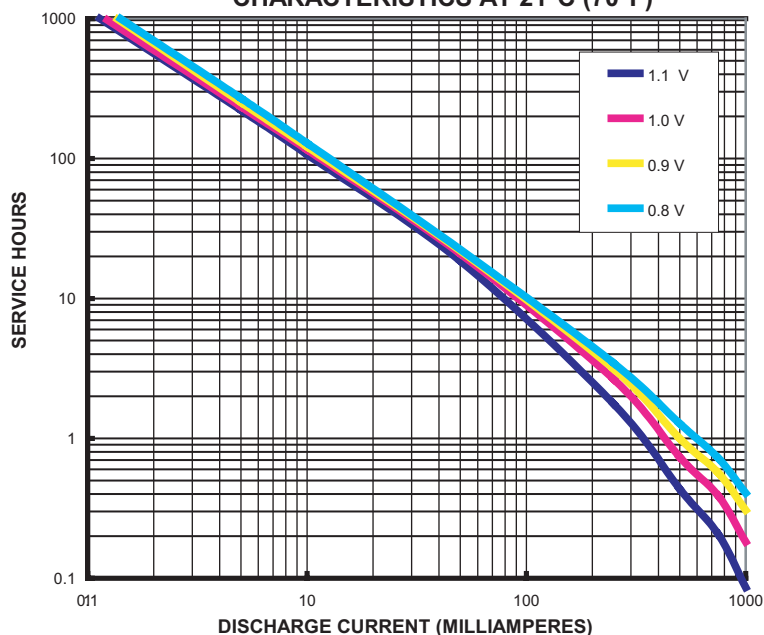

TYPICAL DISCHARGE CHARACTERISTICS
AT 21°C (70°F)

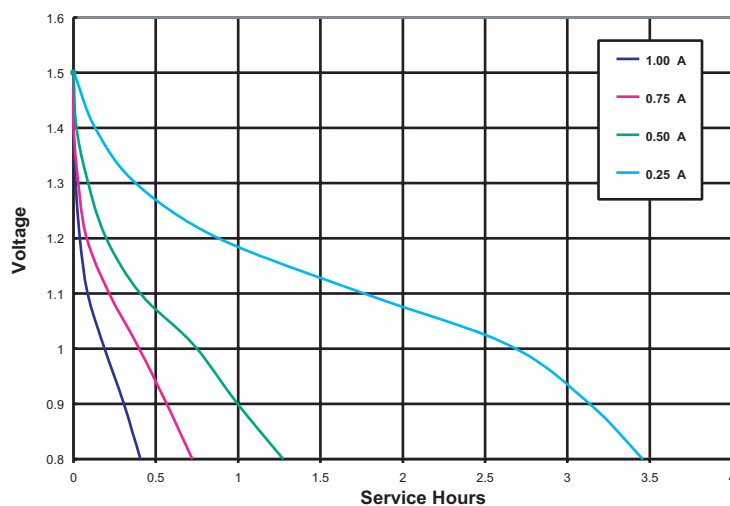

TYPICAL DISCHARGE CHARACTERISTICS
AT 21°C (70°F)

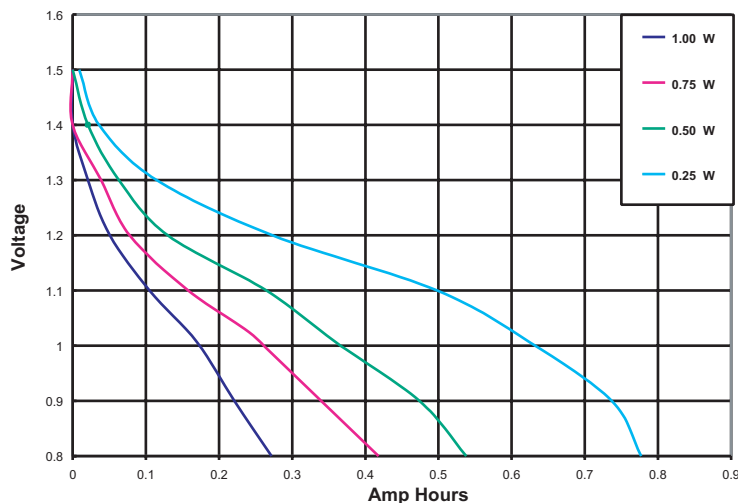

DURACELL®
BATTERIES

Gillette Europe
Geneva, Switzerland

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.